

ManiHeat Heating Range

HEATING RANGE



ManiHeat Panel Heaters

Manrose Standard Panel Heaters are perfect for smaller rooms such as bedrooms, studies, conservatories and loft conversions. IP24 rated. Manrose Panel Heaters offer a wide range of heat outputs from 750W to 2000W and every model is available with or without a timer. Manrose Panel Heaters look as good as they perform. Stylish and slim, they occupy minimum wall space and are finished in an attractive White finish. Manrose Panel Heaters are wall mounted and connected to the permanent electrical supply via a fused connection switched outlet.

All Manrose Panel Heaters have a built-in adjustable thermostat offering a full temperature range, including a frost protection setting of 5°C. For maximum safety there is a thermal cutout on all models to prevent overheating, should the outlet grille be accidentally covered

- Conveniently located controls.
- Range of heat outputs from 750W to 2.0kW
- Integral frost thermostat set at 5°C
- Safety thermal cutout on all models for added safety
- Supplied with wall mounting brackets
- 1 metre of cable supplied as standard – reduces installation time

Specification

Thermostat - Built in electronic ambient thermostat 0.5°C.

Element - Compact, mineral filled sheathed element for silent operation


Thermal cutout - Automatic reset type

Construction Details

Durable epoxy-polyester powder coated steel case with angled grille. Polycarbonate cover over heating controls.

Installation

Detachable wall mounting brackets.

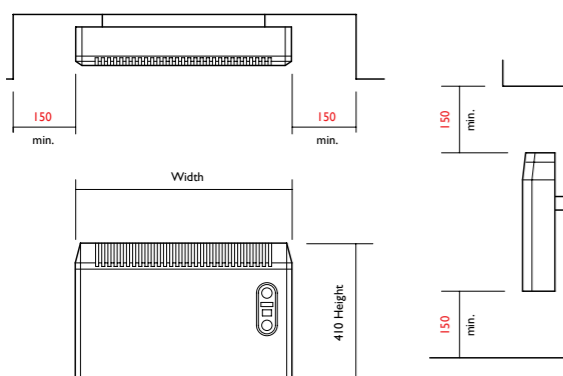

Model	Output kW	Width mm	Height mm	Depth mm	Weight kg
HPH75	0.75	620	430	108	6.2
HPH75T	0.75	620	430	108	6.2
HPH125	1.25	690	430	108	6.6
HPH125T	1.25	690	430	108	6.6
HPH150	1.5	690	430	108	6.6
HPH150T	1.5	690	430	108	6.6
HPH200	2.0	860	430	108	8.0
HPH200T	2.0	860	430	108	8.0

220-240V-50Hz. BEAB Approved.

ManiHeat Heating Range

HEATING RANGE

General Heating Products

Downflow Heater

- Powerful 2kW output
- Automatic safety cutout
- Pullcord operation
- Double insulated Class II appliance

Model	Rating kW	Width mm	Height mm	Depth mm	Weight kg
HDFH	2	300	190	115	2.0

The Manrose Downflow Heater will deliver welcoming warmth when it's most needed in bathrooms and shower areas, as well as in other locations such as kitchens, conservatories and garages. IP24 rated.



Portable Fan Heater

- 3 speed fan
- Fan only mode for summer cooling
- 2 heat settings
- Safety cutout

Model	Output kW
HPFH	2

The Manrose Portable Fan Heater is a floor standing heater with 3 speed settings, fan only, 1kW and 2kW outputs. A variable thermostat. The unit comes complete with 13amp plug.



Convactor Heater

- Silent operation
- Ideal for use where occasional heating is required
- 3 heat outputs
- Thermostatic control
- Safety thermal cutout

Model	Rating kW	Width mm	Height mm	Depth mm	Weight kg
NHCONH	2	590	420	110	3.0

The Manrose Convactor Heater is ideal for use in any room where extra heating or occasional heating is required (not recommended for use in bathrooms). The Manrose Convactor Heater is suitable for either domestic or commercial use and can be floor standing or wall mounted.

